

# Choose Brezline for your codends

# Brezline

BREZLINE twines are made according to **Le Drezen's own rigorous manufacturing process** and with strict quality control at every stage.

## More resistant

A unique process allows us **to increase significantly its resistance to abrasion.**


## Excellent mesh stability

The compactness of BREZLINE twine minimises the penetration of impurities such as sand and sediment into the twine itself, resulting in a **higher mesh stability**. As the BREZLINE fibres are hard, the netting is passed through a **double autoclave heatsetting process** to ensure that the knots are tight.

## Better profitability

Our customers have seen **better catch rates** when using BREZLINE codends, especially on species such as squid, red mullet and prawn. BREZLINE in the codends of trawlers working on hard grounds has been repeatedly shown to **last much longer** than standard green PE netting.

Diameter	Runnage (m/kg)	Twine breaking strength	Breaking strength at the knot
1,8 mm	510	67 kg	90 kg
2,5 mm	338	105 kg	137 kg
3 mm	235	142 kg	186 kg
4 mm	145	248 kg	329 kg
5 mm	105	327 kg	428 kg
6 mm	70	436 kg	623 kg
8 mm	40	866 kg	991 kg

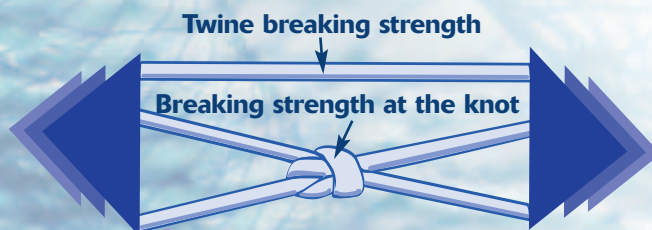

**Breaking  
strength tests**